

100W Rear Exit Flexi Solar Panel

Ideal for flat roofs as well as surfaces with a slight curve, the PV Logic Flexi solar panels are robust, lightweight and extremely versatile. Perfect for marine buoys, boat decks and camper vans, the panel's seven layer construction delivers performance and strength.

The ETFE top layer is 'self-healing' so that if a panel comes into contact with something abrasive, such as a branch, any slight scratches are 'healed' within a few hours.

During production the ETFE is dimpled to further protect the panel and provide an anti-slip surface, particularly useful if the panel is fitted to a boat deck.

To ensure long term performance in the most extreme environments, the Flexi panels are tested to ASTM B117 - ISO9227 for salt water spray over 1000 hours as well as accelerated Ultraviolet (UV) testing to ISO 4892.

PV Logic flexi solar panels have a 5-year product warranty and a 20-year cell warranty (cell performance warranty states that at 20 years the cell output will be no less than 80% of new performance values – i.e. the cell degradation rate will be no greater than 20% in 20 years).


A 10Ah charge controller should be used with this panel to protect the battery from being overcharged and to prevent reverse of current drain. We recommend the STCC10 or the MPPT Pro Charge Controller.

For optimum battery performance, pair your panel with our **Lifos advanced lithium batteries** in 68Ah (equivalent to 120Ah lead acid battery) or 105Ah sizes (equivalent to 200Ah lead acid battery). Connect up to four Lifos batteries in parallel or series to increase the current or voltage.

For further information from our Technical Team, please contact support@solartechnology.co.uk



7 LAYER CONSTRUCTION




SPECIFICATIONS

Size	980x650x4mm
Weight (Kg)	3.75
*Watts per day (W)	600
*Amp hours per day (A)	36.84
Charge controller	10Ah
Vmp (VDC) nominal voltage	17.6
Imp (A) nominal current	5.68
Voc (V)	21.9
Isc (A) short circuit current	6.14

*Watts and Amp hours/day based on six hours of average daily peak sunshine hours.

Above specification at standard test conditions (STC) 1000w/m Cell Temp 25c, AM 1.5

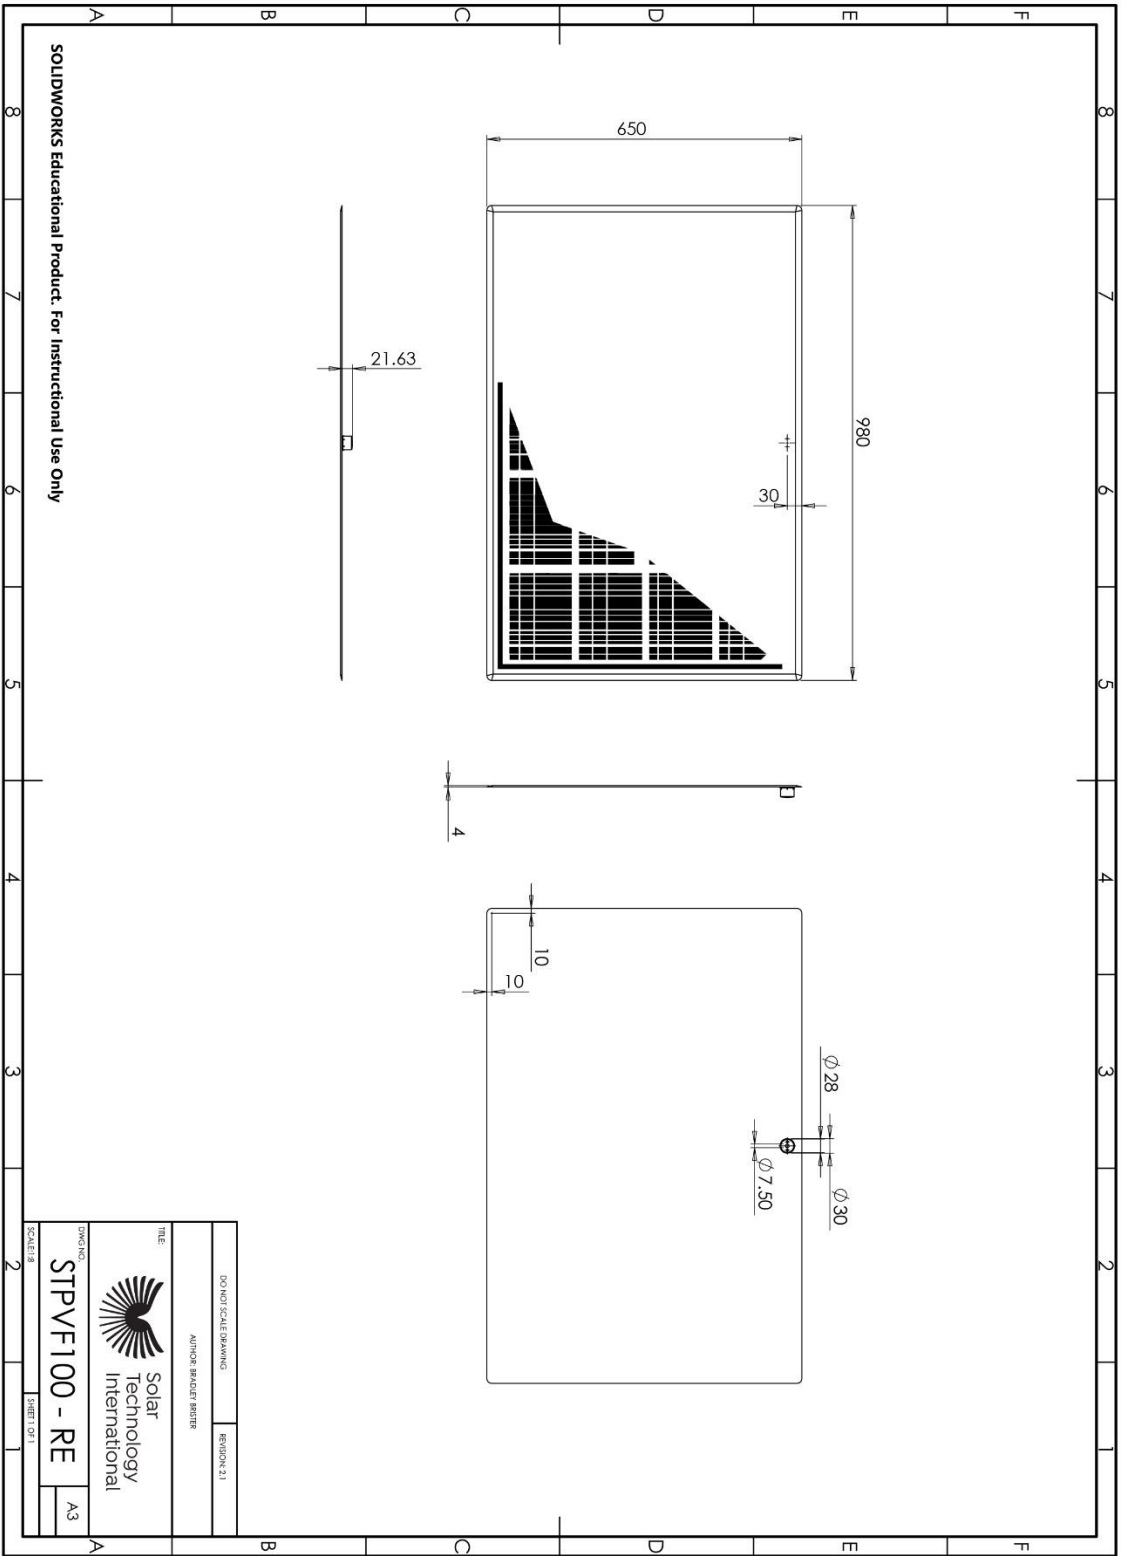

SOLIDWORKS Educational Product. For Instructional Use Only